GENERAL ARRANGEMENT DRAWING

11 × 10 m RCC Solid Slab Major Bridge

River Patheri · Ch. 8+450 · District Sangli

Total length	110.000 m (11 spans @ 10.000 m)
Overall width	11.65 m (7.50 cw + 2×1.50 fp + kerbs/barriers)
Superstructure	RCC solid slab M30, 900 mm, L/d = 11.1
Substructure	Wall pier M25 H=6.5 m · Cantilever abutment M25 H=4.5 m
Foundation	Open footing M20 · SBC 450 kPa · FoS 3.0
Hydraulics	Q100 = 850 m³/s · HFL 242.500 · Freeboard 2.00 m
Loading	IRC Class A · Seismic Zone III · Vb 44 m/s
Bearings / joints	Elastomeric 44 nos · Modular EJ 2 nos at ends

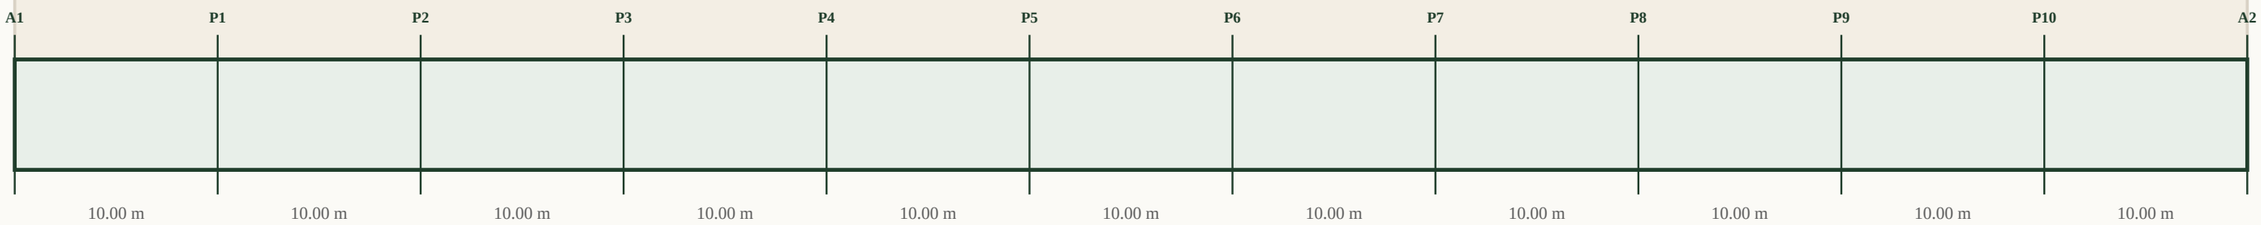

SPAN ARRANGEMENT · 11 @ 10.000 m = 110.000 m

Sheets generated

NO.	SHEET	CONTENTS
01	**Plan**	General plan with span chainage, carriageway, approaches
02	**Longitudinal section**	Soffit, HFL/LWL, piers, abutments, scour
03	**Cross section**	Deck, footpath, kerb, crash barrier, camber
04	**Foundation**	Open footing, founding level, SBC notes
05	**Pier & abutment**	Wall pier, cap, cantilever abutment, wing/return
06	**Bearings & joints**	Elastomeric schedule and expansion joints
07	**Bill of quantities**	Concrete, steel, bearings — priced MH PWD

Designed: Er. A. Deshpande Checked: Er. P. Joshi Approved: Er. S. Patil (CE — PMGSY)

DXF package: 8 files in 11span_110m_rcc_slab/